



## Benchtop Digital Multimeter Introducing the GPS-3065X



A 6 ½ digit digital dual-display multimeter perfectly suited to high-precision, multifunction and automatic measurements

*Relevant application fields:* Research Lab, Development Lab, Detection and Maintenance, Calibration Lab, Automatic Production Testing

### Key Features

- 4.3" TFT-LCD, 480\*272
- Real 6½ digits reading resolution (2,200,000 counts)
- 1Gb Nand flash size. Mass storage configuration files and data files
- True-RMS AC Voltage and AC Current measurements
- Supports dual display
- File management (support for U-disc and local storage)
- Built-in cold terminal compensation for thermocouple
- Easy, convenient and flexible complete sensor control measurement software: EasyDMM
- Standard interface: USB Device, USB Host, LAN (Optional Accessories: GPIB and Scanner Card)
- Built-in help system makes information acquisition much simpler
- Supports remote control via commands (commands compatible with mainstream multimeters)


### Basic Measurement Functions:

- DC Voltage: 200 mV ~ 1000 V
- DC Current: 200  $\mu$ A ~ 10 A
- AC Voltage: True-RMS, 200 mV ~ 750 V
- AC Current: True-RMS, 200  $\mu$ A ~ 10 A
- 2/4-Wire Resistance: 200 $\Omega$  ~ 100 M $\Omega$
- Capacitance: 2 nF ~ 100 mF
- Continuity Test: Range is fixed at 2 k $\Omega$
- Diode Test: Adjustable range is 0 ~ 4V.
- Frequency Measurement: 3 Hz ~ 1 MHz
- Period Measurement: 1  $\mu$ s ~ 333.33 ms
- Temperature: Support for TC and RTD sensor


### Math Functions:

- Max, Min, Average
- Standard Deviation
- dBm/dB
- Relative Measurement
- Pass/Fail Histogram
- Trend Chart
- Bar Meter


### Histogram Chart

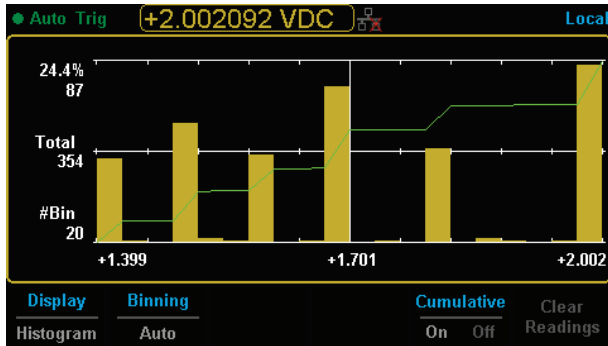


### Trend Chart

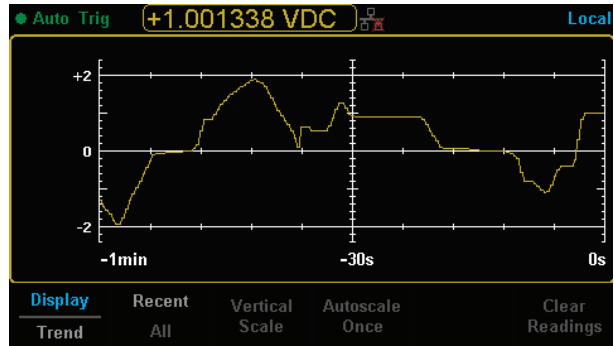


### Bar Chart

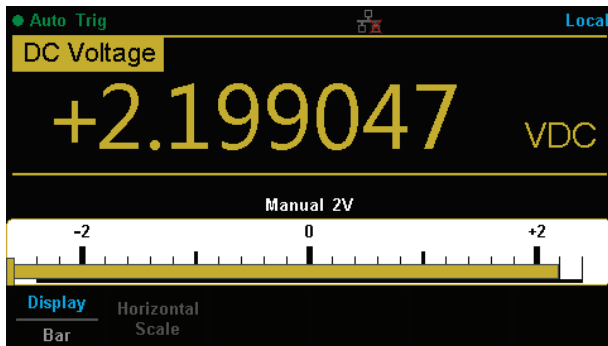


### Statistics Display

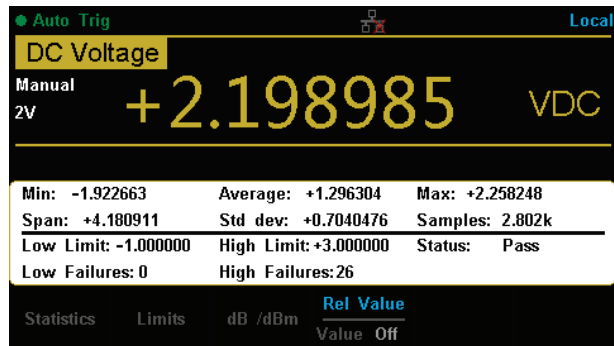


### Dual Display

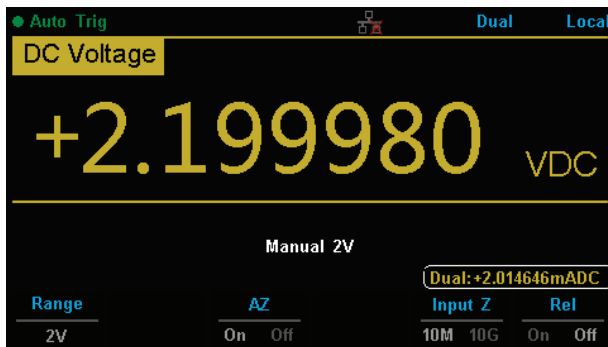

### HOLD Measurement

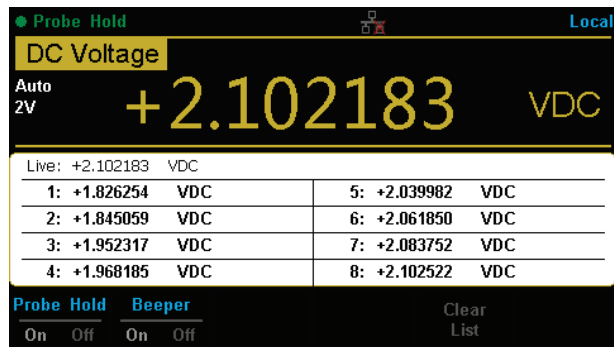

### dBm HOLD Measurement

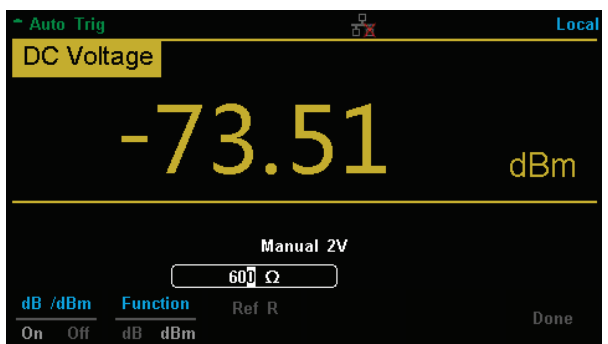

### Multiple Interfaces



### DC Characteristics

Function	Range [2]	Test Current of Burden Voltage	24-hour [3] TCAL°C ±1°C	90-day TCAL°C ±5°C	1-year TCAL°C ±5°C	Temperature coefficient 0°C to (TCAL°C -5°C) (TCAL°C +5°C) to 50°C
DC Voltage	200.0000 mV		0.0020+ 0.0015	0.0030 + 0.0020	0.0040 + 0.0023	0.0005 + 0.0003
	2.000000 V		0.0015 + 0.0004	0.0020 + 0.0004	0.0035 + 0.0006	0.0005 + 0.0001
	20.00000 V		0.0020 + 0.0003	0.0030 + 0.0004	0.0040 + 0.0004	0.0005 + 0.0001
	200.0000 V		0.0020 + 0.0005	0.0040 + 0.0004	0.0050 + 0.0005	0.0005 + 0.0001
	1000.000 V [4]		0.0020 + 0.0005	0.0040 + 0.0008	0.0055 + 0.0008	0.0005 + 0.0001
DC Current	200.0000 µA	< 0.03V	0.009 + 0.010	0.040 + 0.005	0.050 + 0.005	0.0020 + 0.0026
	2.000000 mA	< 0.25V	0.007 + 0.001	0.030 + 0.001	0.050 + 0.002	0.0020 + 0.0001
	20.00000 mA	< 0.07 V	0.006 + 0.008	0.030 + 0.005	0.050 + 0.005	0.0020 + 0.0015
	200.0000 mA	< 0.7V	0.009 + 0.001	0.030 + 0.001	0.050 + 0.002	0.0020 + 0.0001
	2.000000 A	< 0.12 V	0.045 + 0.015	0.080 + 0.005	0.100 + 0.012	0.0050 + 0.0008
	10.00000 A [5]	< 0.6 V	0.090 + 0.002	0.120 + 0.005	0.150 + 0.005	0.0050 + 0.0018
Resistance [6]	200.0000 Ω	1 mA	0.0030 + 0.0031	0.008 + 0.005	0.010 + 0.004	0.0006 + 0.0006
	2.000000 KΩ	1 mA	0.0020 + 0.0005	0.008 + 0.001	0.010 + 0.001	0.0006 + 0.0001
	20.00000 KΩ	100 µA	0.0020 + 0.0005	0.008 + 0.001	0.010 + 0.001	0.0006 + 0.0001
	200.0000 KΩ	10 µA	0.0020 + 0.0005	0.008 + 0.001	0.010 + 0.001	0.0006 + 0.0001
	1.000000 MΩ	2 µA	0.0020+ 0.0010	0.010 + 0.001	0.012 + 0.001	0.0010 + 0.0002
	10.00000 MΩ	200 nA	0.015 + 0.001	0.030 + 0.001	0.040 + 0.001	0.0030 + 0.0005
	100.0000 MΩ	200 nA    10 MΩ	0.300 + 0.010	0.800 + 0.010	0.800 + 0.010	0.1500 + 0.0002
Diode Test [7]	0~ 2V	1 mA	0.002 + 0.009	0.008 + 0.020	0.010 + 0.020	0.0010 + 0.0020
	2~ 4V	1 mA	0.002 + 0.010	0.008 + 0.020	0.010 + 0.020	0.0010 + 0.0020
Continuity Test	2000.0 Ω	1 mA	0.002 + 0.010	0.008 + 0.020	0.010 + 0.020	0.0010 + 0.0020

#### Remarks:

[1] Specifications are for 90-minute warm-up and 100NPLC integration time. For integration time <100NPLC, add the appropriate "RMS Noise Adder" listed in the following table.

[2] 10% over range on all ranges except DCV 1000V and DCI 10A range.

[3] Relative to calibration standards.

[4] For each additional volt over ± 500 V, add 0.03mV error.

[5] For continuous current > 7A DC or 7A AC RMS, 30 seconds ON and 30 seconds OFF.

[6] Specifications are for 4-wire resistance measurement or 2-wire resistance measurement using REL operation. Without REL operation, add 0.2 Ω additional error in 2-wire resistance measurement.

[7] Accuracy specifications for the voltage measured at the input terminal only. 1 mA test current is typical. Variation in the current source will create some variation in the voltage drop across a diode junction. Adjustable voltage range: 0~ 4V.

www.gpslimited.com/3065X  
For all enquiries, Tel: +44 (0) 208 964 3600  
Email: info@gpslimited.com

### Performance Versus Integration Time - 50 Hz (60 Hz) Power-line Frequency

Integration Time Number of Power Line Cycles (NPLC) [5]	Resolution [1] (ppm Range)	NMRR [2] (dB)	Readings/s [3]		RMS Noise Added [4] (% of Range)			
			50Hz	60Hz	DCV 20V	DCV 2V 200V Resistance 2K $\Omega$ 20K $\Omega$	DCV 1000V DCI 2 mA 200mA	DCV 200mV Resistance 200 $\Omega$ DCI 10A
0.005(0.006)	2.7	0	10000	10000	0.0006	0.0008	0.0015	0.0040
0.05 (0.06)	1.6	0	1000	1000	0.0004	0.0005	0.0008	0.0025
0.5 (0.6)	1	0	100	100	0.0003	0.0003	0.0006	0.0025
1	0.22	60	50	60	0	0.0001	0.0002	0.0005
10	0.08	60	5	6	0	0	0	0.0002
100	0.035	60	0.5	0.6	0	0	0	0

#### Remarks:

[1] Typical value Resolution is defined as the typical 20V range RMS noise.

[2] Normal mode rejection ratio for power-line frequency  $\pm 0.1\%$ . For power-line frequency  $\pm 1\%$ , subtract 20 dB. For  $\pm 3\%$ , subtract 30dB.

[3] Maximum rate for DCV,DCI, 2-wire resistance and 4-wire resistance functions.

[4] The basic DC accuracy specifications include RMS noise at 100 NPLC. For <100 NPLC, add "RMS Noise Adder" to the basic DC accuracy specifications.

[5] When Power Supply of frequency is 60Hz, the cycles are 0.006, 0.06, 0.6, 1, 10, 100 NPLC.

### SFDR & SINAD [1]

Function	Range	Spurious-Free Dynamic Range (SFDR)	Signal-to-Noise-and-Distortion (SINAD)
DCV	200mV	80	75
	2V	76	80
	20V	78	72
	200V	80	78
	1000V	82	80
DCI	200uA	90	70
	2mA	90	80
	20mA	85	70
	200mA	80	75
	2A	70	60

[1] Typical value. -1dBFS, 1k Hz single tone. 100  $\mu$ s aperture time and auto zero off.

### AC Characteristics

Accuracy ± (% of reading + % of range) <sup>[1]</sup>

Function	Range <sup>[2]</sup>	Test Current of Burden Voltage	24-hour <sup>[3]</sup>	90-day	1-year	Temperature coefficient
			TCAL °C ±1°C	TCAL °C ±5°C	TCAL °C ±5°C	0°C to (TCAL °C -5°C) (TCAL °C +5°C) to 50°C
True-RMS AC Voltage <sup>[4]</sup>	200.0000mV	3Hz- 5Hz	1.00 + 0.03	1.00 + 0.04	1.00 + 0.04	0.100 + 0.004
		5Hz-10Hz	0.35 + 0.03	0.35 + 0.04	0.35 + 0.04	0.035 + 0.005
		10Hz-20kHz	0.04 + 0.03	0.05 + 0.04	0.06 + 0.04	0.005 + 0.004
		20kHz-50kHz	0.10 + 0.05	0.11 + 0.05	0.12 + 0.05	0.011 + 0.005
		50kHz-100kHz	0.55 + 0.08	0.60 + 0.08	0.60 + 0.08	0.060 + 0.008
		100kHz- 300kHz	4.00 + 0.50	4.00 + 0.50	4.00 + 0.50	0.20 + 0.02
	2.000000 V	3Hz- 5Hz	1.00 + 0.02	1.00 + 0.03	1.00 + 0.03	0.100 + 0.003
		5Hz-10Hz	0.35 + 0.02	0.35 + 0.03	0.35 + 0.03	0.035 + 0.003
		10Hz-20kHz	0.04 + 0.02	0.05 + 0.03	0.06 + 0.03	0.005 + 0.003
		20kHz-50kHz	0.10 + 0.04	0.11 + 0.05	0.12 + 0.05	0.011 + 0.005
		50kHz-100kHz	0.55 + 0.08	0.60 + 0.08	0.60 + 0.08	0.060 + 0.008
		100kHz- 300kHz	4.00 + 0.50	4.00 + 0.50	4.00 + 0.50	0.20 + 0.02
	20.00000 V	3Hz- 5Hz	1.00 + 0.03	1.00 + 0.04	1.00 + 0.04	0.100 + 0.004
		5Hz-10Hz	0.35 + 0.03	0.35 + 0.04	0.35 + 0.04	0.035 + 0.004
		10Hz-20kHz	0.04 + 0.04	0.07 + 0.04	0.08 + 0.04	0.008 + 0.004
		20kHz-50kHz	0.10 + 0.05	0.12+ 0.05	0.15 + 0.05	0.012 + 0.005
		50kHz-100kHz	0.55 + 0.08	0.60 + 0.08	0.60 + 0.08	0.060 + 0.008
		100kHz- 300kHz	4.00 + 0.50	4.00 + 0.50	4.00 + 0.50	0.20 + 0.02
	200.0000 V	3Hz- 5Hz	1.00 + 0.02	1.00 + 0.03	1.00 + 0.03	0.100 + 0.003
		5Hz-10Hz	0.35 + 0.02	0.35 + 0.03	0.35 + 0.03	0.035 + 0.003
		10Hz-20kHz	0.04 + 0.02	0.07 + 0.03	0.08 + 0.03	0.008 + 0.003
		20kHz-50kHz	0.10 + 0.04	0.12+ 0.05	0.15 + 0.05	0.012 + 0.005
		50kHz-100kHz	0.55 + 0.08	0.60 + 0.08	0.60 + 0.08	0.060 + 0.008
		100kHz- 300kHz	4.00 + 0.50	4.00 + 0.50	4.00 + 0.50	0.20 + 0.02
750.0000 V <sup>[5]</sup>	3Hz- 5Hz	1.00 + 0.02	1.00 + 0.03	1.00 + 0.03	0.100 + 0.003	
	5Hz-10Hz	0.35 + 0.02	0.35 + 0.03	0.35 + 0.03	0.035 + 0.003	
	10Hz-20kHz	0.04 + 0.02	0.07 + 0.03	0.08 + 0.03	0.008 + 0.003	
	20kHz-50kHz	0.10 + 0.04	0.12+ 0.05	0.15 + 0.05	0.012 + 0.005	
	50kHz-100kHz	0.55 + 0.08	0.60 + 0.08	0.60 + 0.08	0.060 + 0.008	
	100kHz- 300kHz	4.00 + 0.50	4.00 + 0.50	4.00 + 0.50	0.20 + 0.02	

**Remarks:**

[1] Specifications are for 90-minute warm-up, > 3Hz ac filter and sine wave input.

[2] 10% over range on all ranges except ACV 750 V and ACI 10 A ranges.

[3] Relative to calibration standards.

[4] Specifications are for sine wave input >5% of range. For inputs within 1% and 5% of range and <50 kHz, add 0.1% of range additional error. For 50 kHz to 100k Hz, add 0.13% of range additional error.

Function	Range	Test Current of Burden Voltage	24-hour	90-day	1-year	Temperature coefficient 0°C to (TCAL°C -5°C) (TCAL°C +5°C) to 50°C
			TCAL°C ±1°C	TCAL°C ±5°C	TCAL°C ±5°C	
True-RMS AC Current [3]	200.0000 uA	3Hz- 5Hz	1.10 + 0.06	1.10 + 0.06	1.10 + 0.06	0.200 + 0.005
		5Hz-10Hz	0.35 + 0.06	0.35 + 0.06	0.35 + 0.06	0.100 + 0.005
		10Hz-5kHz	0.15 + 0.06	0.15 + 0.06	0.15 + 0.06	0.015 + 0.005
		5kHz-10kHz	0.35 + 0.70	0.35 + 0.70	0.35 + 0.70	0.030 + 0.005
	2.000000mA	3Hz- 5Hz	1.00 + 0.04	1.00 + 0.04	1.00 + 0.04	0.100 + 0.005
		5Hz-10Hz	0.30 + 0.04	0.30 + 0.04	0.30 + 0.04	0.035 + 0.005
		10Hz-5kHz	0.12 + 0.04	0.12 + 0.04	0.12 + 0.04	0.015 + 0.005
		5kHz-10kHz	0.20 + 0.25	0.20 + 0.25	0.20 + 0.25	0.030 + 0.005
	20.00000mA	3Hz- 5Hz	1.10 + 0.06	1.10 + 0.06	1.10 + 0.06	0.200 + 0.005
		5Hz-10Hz	0.35 + 0.06	0.35 + 0.06	0.35 + 0.06	0.100 + 0.005
		10Hz-5kHz	0.15 + 0.06	0.15 + 0.06	0.15 + 0.06	0.015 + 0.005
		5kHz-10kHz	0.35 + 0.70	0.35 + 0.70	0.35 + 0.70	0.030 + 0.005
	200.0000mA	3Hz- 5Hz	1.00 + 0.04	1.00 + 0.04	1.00 + 0.04	0.100 + 0.006
		5Hz-10Hz	0.30 + 0.04	0.30 + 0.04	0.30 + 0.04	0.035 + 0.006
		10Hz-5kHz	0.10 + 0.04	0.10 + 0.04	0.10 + 0.04	0.015 + 0.006
		5kHz-10kHz	0.20 + 0.25	0.20 + 0.25	0.20 + 0.25	0.030 + 0.006
	2.000000 A	3Hz- 5Hz	1.10 + 0.06	1.10 + 0.06	1.10 + 0.06	0.100 + 0.006
		5Hz-10Hz	0.35 + 0.06	0.35 + 0.06	0.35 + 0.06	0.035 + 0.006
		10Hz-5kHz	0.15 + 0.06	0.15 + 0.06	0.15 + 0.06	0.015 + 0.006
		5kHz-10kHz	0.35 + 0.70	0.35 + 0.70	0.35 + 0.70	0.030 + 0.006
	10.00000 A <sup>[1]</sup>	3Hz- 5Hz	1.10 + 0.08	1.10 + 0.10	1.10 + 0.10	0.100 + 0.008
		5Hz-10Hz	0.35 + 0.08	0.35 + 0.10	0.35 + 0.10	0.035 + 0.008
		10Hz-5kHz	0.15 + 0.08	0.15 + 0.10	0.15 + 0.10	0.015 + 0.008

Frequency	Additional Low Frequency Errors(% of reading)			Additional Crest Factor Errors (non-sine wave) <sup>[2]</sup>	
	AC Filter	Crest Factor		error (% of reading)	
	> 3Hz	> 20 Hz	> 200Hz		
10Hz-20Hz	0	0.74	--	1 - 2	0.05
20Hz-40Hz	0	0.22	--	2 - 3	0.2
40Hz-100Hz	0	0.06	0.73	3 - 4	0.4
100Hz- 200Hz	0	0.01	0.22	4 - 5	0.5
200Hz-1kHz	0	0	0.18		
> 1kHz	0	0	0		

[1] For continuous current > DC 7A or AC RMS 7A, 30 seconds ON and 30 seconds OFF.

[2] For frequency below 100 Hz, the specification of slow filter is only for sine wave input.

[3] Specifications are for sine wave input >5% of range. For inputs within 1% to 5% of range, add 0.1% of range additional error. Specifications are typical values for 200uA and 2mA, 2A and 10A ranges when frequency >1k Hz.

### Frequency and Period Characteristics

Accuracy± (%of reading) <sup>[1] [2]</sup>

Function	Range	Test Current of Burden Voltage	24-hour <sup>[3]</sup>	90-day	1-year	Temperature coefficient
			TCAL°C ±1°C	TCAL°C ±5°C	TCAL°C ±5°C	0°C to (TCAL°C -5°C) (TCAL°C +5°C) to 50°C
Frequency, Period	200 mV to 750 V	3 Hz - 5Hz	0.07	0.07	0.07	0.005
		5 Hz - 10 Hz	0.04	0.04	0.04	0.005
		10 Hz - 40 Hz	0.02	0.02	0.02	0.001
		40 Hz -300 KHz	0.005	0.006	0.007	0.001
		300 KHz - 1 MHz	0.005	0.006	0.007	0.001
Frequency	Gate Time (Resolution)					
	1s (0.1ppm)	0.1 s (1ppm)	0.01 s (10ppm)	0.001 s (100ppm)		
3 Hz- 5Hz	0	0.12	0.12	0.12		
5 Hz- 10 Hz	0	0.17	0.17	0.17		
10 Hz-40 Hz	0	0.20	0.20	0.20		
40 Hz-100 Hz	0	0.06	0.21	0.21		
100 Hz-300 Hz	0	0.03	0.21	0.21		
300Hz-1 KHz	0	0.01	0.07	0.07		
> 1 K Hz	0	0	0.02	0.02		

**Remarks:**

[1] Specifications are for 90 minutes warm-up, using 1s gate time.

[2] For frequency ≤ 300 kHz, the specification is the 10% to 110% of range of the AC input voltage. For frequency > 300 kHz, the specification is the 20% to 110% of range of the AC input voltage. The maximum input is limited to 750V rms or 8 × 10<sup>7</sup> Volts-Hz (whichever is less). The 200mV range is full range input or input that is larger than the full range. For 20mV to 200mV, multiply % of reading error ×10.

[3] Relative to calibration standards.

### Capacitance Characteristics

Accuracy± (%of reading + % of range) <sup>[1]</sup>

Function	Range <sup>[2]</sup>	Test Current	1-year	Temperature coefficient
			TCAL°C ±5°C	0°C to (TCAL°C -5°C) (TCAL°C +5°C) to 50°C
Capacitance	2.0000 nF	10 µA	2 + 2.4	0.05 + 0.06
	20.000 nF	10 µA	1 + 0.1	0.05 + 0.01
	200.00 nF	100µA	1 + 0.1	0.01 + 0.01
	2.0000µF	100µA	1 + 0.1	0.01 + 0.01
	20.000µF	1 mA	1 + 0.1	0.01 + 0.01
	200.00µF	1 mA	1 + 0.1	0.01 + 0.01
	2.0000 mF	1 mA	1 + 0.1	0.01 + 0.01
	20.000 mF	1 mA	1 + 0.1	0.01 + 0.01
	100.00 mF	1 mA	3 + 0.1	0.05 + 0.02

**Remarks:**

[1] Specifications are for 90 minutes warm-up and using REL operation. Additional errors may be caused by non-film capacitors.

[2] Specifications are the 1% to 110% of range on 2nF range and 10% to 110% of range on all other ranges

www.gpslimited.com/3065X  
 For all enquiries, Tel: +44 (0) 208 964 3600  
 Email: info@gpslimited.com

**Temperature Characteristics**

Accuracy± (% of Reading) <sup>[1]</sup>

Function	Probe Type	Type	Optimum Range	1-year TCAL°C ±5°C	Temperature coefficient 0°C to (TCAL°C -5°C) (TCAL°C +5°C) to 50°C
Temperature	RTD <sup>[2]</sup> (R0 is 49Ω to 2.1kΩ)	a= 0.00385	-200°C ~ 660°C	0.16°C	0.01°C
		B	0°C ~ 1820°C	0.76°C	0.14°C
	Thermocouple <sup>[3]</sup>	E	-270°C ~ 1000°C	0.5°C	0.02°C
		J	-210°C ~ 1200°C	0.5°C	0.02°C
		K	-270°C ~ 1370°C	0.5°C	0.03°C
		N	-270°C ~1300°C	0.5°C	0.04°C
		R	-270°C ~ 1760°C	0.5°C	0.09°C
		S	-270°C ~ 1760°C	0.6°C	0.11°C
		T	-270°C ~ 400°C	0.5°C	0.03°C

**Remarks:**

[1] Specifications are for 90 minutes warm-up. Exclusive of sensor error.

[2] Specification is for 4WR sensor measurement or 2WR measurement using REL operation.

[3] Relative to cold junction temperature, accuracy is based on ITS-90. Built-in cold junction temperature refers to the temperature inside the banana jack and its accuracy is ± 2.5

Function	Setting	Integration	Reading/s 50Hz (60Hz)
DC Voltage DC Current	0.005 (0.006) NPLC	100(100) μs	10000 (10000)
	0.05 (0.06) NPLC	1 (1) ms	1000 (1000)
	0.5 (0.5) NPLC	4 (4) ms	100 (100)
	2 - wire Resistance 4 - wire Resistance	1 NPLC	20(16.7) ms
	10 NPLC	200(167) ms	5 (6)
	100 NPLC	2(1.67) s	0.5 (0.6)
AC Voltage AC Current	3Hz AC Filter		0.5
	20Hz		2
	200Hz		50
Frequency and Period <sup>[1]</sup>	1s Gate time		1
	0.1s		10
	0.01s		100
	0.001s		500
Capacitance <sup>[2]</sup>	100mF Range		0.5

**Remarks:**

[1] 20 V range, 1k Hz input.

[2] The measurement period changes with the capacitance under test.



DC Voltage	
Input Resistance	200 mV, 2 V, 20 V ranges: Selectable 10 M $\Omega$ or > 10 G $\Omega$ (For these ranges, input beyond $\pm 26V$ are clamped through 106 k $\Omega$ (typical))  200 V and 1000 V ranges: 10 M $\Omega$ $\pm$ 1%
Input Offset Current	50 pA, 25°C, typical
Input Protection	1000 V
CMRR (common mode rejection ratio)	140 dB for 1 k $\Omega$ unbalance in LO lead, $\pm$ 500 VDC peak maximum
Resistance	
Measurement Method	Selectable 4-wire or 2-wire resistance  Current source referenced to LO input
Open-circuit Voltage	Limited to <10V
Max. Lead Resistance (4-wire)	10% of range per lead for 200 $\Omega$ , 2 k $\Omega$ ranges, 1 k $\Omega$ per lead on all other ranges
Offset Compensation	Available on 200 $\Omega$ , 2k $\Omega$ and 20 k $\Omega$ ranges
Input Protection	1000 V on all ranges
DC Current	
Shunt Resistor	100 $\Omega$ for 200 $\mu$ A, 2 m A  1 $\Omega$ for 20 m A, 200 m A  0.01 $\Omega$ for 2 A, 10 A
Input Protection	Rear panel: accessible 10 A, 250 V fast-melt fuse  Internal 10 A, 250 V slow blow fuse for 2 A and 10 A ranges
Continuity / Diode Test	
Measurement Method	1 m A $\pm$ 5% constant-current source or open-circuit voltage
Response Time	300 samples/sec, with audible tone
Beeper	Yes
Diode Threshold	Adjustable from 0 to 4 V
Continuity Threshold	Adjustable from 1 $\Omega$ to 2 K $\Omega$
Input Protection	1000 V
<b>Settling Time Considerations</b>	
Reading settling times are affected by source impedance, cable dielectric characteristics and input signal changes. The default measurement delay is selected to give first reading right for most measurements.	
<b>Measurement Considerations</b>	
Teflon or other high-impedance, low-dielectric absorption wire insulation is recommended for these measurements	

True RMS AC Voltage	
Measurement Method	AC-coupled True-RMS measurement with up to 400 V DC of bias at on any range.
Crest Factor	≤ 5 at full range
Input Impedance	1MΩ ± 2% in parallel with <150pF capacitance on any range
Input Protection	750V rms on all ranges
AC Filter Bandwidth	Slow : 3 Hz ~ 300 KHz
	Medium : 20 Hz ~ 300 KHz
	Fast : 200 Hz ~ 300 KHz
CMRR (common mode rejection ratio)	70 dB, for the 1 kΩ unbalance in LO lead, < 60 Hz, ± 500 VDC peak maximum

True RMS AC Current	
Measurement Method	Direct coupled to the fuse and shunt; AC-coupled True RMS measurement (Measure the AC component only).
Crest Factor	≤ 3 at full range
Max. Input	DC + AC current peak value < 300% of range. The RMS current < 10 A rms including the DC component.
Shunt Resistor	100Ω for 200uA, 2mA
	1Ω for 20mA,200mA
	0.01Ω for 2A,10A
Input Protection	Externally accessible 500mA, 250V fast blow fuse
	Internal 12A, 250 V slow blow fuse

### Settling Time Considerations

The default measurement delay is selected to give first reading right for most measurements. Make sure the RC circuit of input terminal has been fully settled (about 1s) before accurate measurement.

Applying > 300 Vrms (or > 5Arms) will cause self-heating in signal-conditioning components and these error are included in the instrument specifications. Internal temperature changes due to self-heating may cause additional error on lower ac voltage ranges. The additional error will be lower than 0.02% of reading and will generally dissipate within a few minutes.

### Frequency and Period

Measurement Method	Reciprocal-counting technique, AC-coupled input using the AC voltage function.
Input Impedance	1 MΩ ± 2% in parallel with < 150 pF capacitance on any range
Input Protection	750 V rms on all ranges
Measurement Considerations	All frequency counters are susceptible to error when measuring low-voltage, low-frequency signals. Shielding inputs from external noise
Settling Time Considerations	Errors will occur when attempting to measure the frequency or period of an input following a dc offset voltage change. Make sure the RC circuit of input terminal has been fully settled (about 1s) before accurate measurement.

### Capacitance Measurement

Measurement Method	Apply constant current into the capacitance, and measure the voltage changing rate.
Connection Type	2-wire
Input Protection	1000 V on all ranges
Measurement considerations	Since small capacitance measurements are susceptible to the external noise, shielding inputs from external noise pickup is critical for minimizing measurement errors.

www.gpslimited.com/3065X  
For all enquiries, Tel: +44 (0) 208 964 3600  
Email: info@gpslimited.com

### Temperature Measurement

Measurement Method	Support for TC and RTD types of sensor
Measurement considerations	The built-in cold junction temperature tracks the temperature inside the banana jack. The change of the temperature in banana jack might cause additional error. When using the built-in cold junction compensation, connect the sensor terminal of the thermocouple to the banana jack and warm it up for more than 3 minutes to minimise the error.

### Triggering and Storage

Trigger	Pre-trigger or Pos-trigger, Internal Trigger or External Trigger, Rising Edge Trigger or Falling Edge Trigger
Time Base Resolution	40us, 0.01%Accuracy
Trigger Delay	0 to 1000s
Reading Sensitivity	0.01%、0.1%、1% or 10% reading
Single Trigger Samples	1 to 599999999
External Trigger Input	Level: TTL compatible High level when left input terminal is hanging in the air
	Trigger: Selectable rising edge or falling edge
	Input Impedance: $\geq 30K\Omega//500pF$
	Delay: $< 50 \mu s$
	Maximum Rate: 300/s
VMC Output	Minimum Pulse Width: 2 $\mu s$
	Level 5V TTL Compatible
	Output Polarity Straight and negative optional
	Output Impedance 200 $\Omega$ typical
	Pulse Width: about 2 $\mu s$

### History Records

Volatile Memory	10K reading of history records
Nonvolatile Memory	1Gb Nand Flash, Mass storage configuration files and data files, Support U-disk external storage

### Math Functions

Min/Max/Average, dBm, dB, Pass/Fail, Relative, Standard deviation, Hold, Histogram, Trend chart, Bar chart

Power Supply	
AC 100 V ~ 120 V	45 Hz – 66 Hz
AC 200 V ~ 240 V	45 Hz – 66 Hz
Detects the power-line frequency automatically at power-on, 400Hz defaults to 50Hz	
Power Consumption	25VA max
Mechanism	
Dimension	(l x w x h): 345.45mm × 260.29mm × 107.21mm
Weight	3.377Kg (without packaging)
Other characteristics	
Display Screen	4.3" TFT-LCD with resolution 480*272
Working Environment	Full accuracy for 0°C to 50°C
	Full accuracy to 40°C, 80% R.H., Non-coagulation
	Storage Temperature -20°C to 50°C
	Shock and Vibration: conforming to MIL-T-28800E, III, 5 level (only for sine)
	Height above sea level: up to 3000 meters
EMC	Conforming to EMC (2004/108/EC) and EN 61326-1:2013
Safety	IEC 61010-1; EN 61010-1; UL 61010-1; CAN/CSA-C22.2 No. 61010-1
	Measurement CAT I 1000 V/CAT II 600 V
Remote Interface	10/100Mbit LAN, USB2.0 Full Speed Device, Host
Programmer Language	Standard SCPI, compatible with commands of main stream multimeters
Warm Up Time	90 minutes

Ordering Information	
Product Name	GPS-3065X Benchtop Digital Multimeter
Models	GPS-3065X
Standard Accessories	Power Cord (compatible with standard of destination country)
	Two Test Leads, Two Alligator Clips
	USB Cable
	Quick Start Guide
	1-year Warranty Card
	EasyDMM software
Optional Accessories	GPIB
	Scanner Card

Please visit [www.gpslimited.com](http://www.gpslimited.com) to find your local distributor

www.gpslimited.com/3065X  
 For all enquiries, Tel: +44 (0) 208 964 3600  
 Email: info@gpslimited.com